

Technical drawing of a horizontal cylindrical tank with a hemispherical head. The drawing includes a side view (top) and an end view (bottom).

Side View Dimensions:

- Overall length: 2200±1.5
- Head radius: R1100
- Head thickness: 7L
- Head reinforcement: 200# 100% (A)
- Head reinforcement: 160# 100% (B)
- Head reinforcement: 80# 100% (C)
- Head reinforcement: 50# 100% (D)
- Head reinforcement: 25# 100% (E)
- Head reinforcement: 12# 100% (F)
- Head reinforcement: 6# 100% (G)
- Head reinforcement: 3# 100% (H)
- Head reinforcement: 1# 100% (I)
- Head reinforcement: 1# 100% (J)
- Head reinforcement: 1# 100% (K)
- Head reinforcement: 1# 100% (L)
- Head reinforcement: 1# 100% (M)
- Head reinforcement: 1# 100% (N)
- Head reinforcement: 1# 100% (O)
- Head reinforcement: 1# 100% (P)
- Head reinforcement: 1# 100% (Q)
- Head reinforcement: 1# 100% (R)
- Head reinforcement: 1# 100% (S)
- Head reinforcement: 1# 100% (T)
- Head reinforcement: 1# 100% (U)
- Head reinforcement: 1# 100% (V)
- Head reinforcement: 1# 100% (W)
- Head reinforcement: 1# 100% (X)
- Head reinforcement: 1# 100% (Y)
- Head reinforcement: 1# 100% (Z)

End View Dimensions:

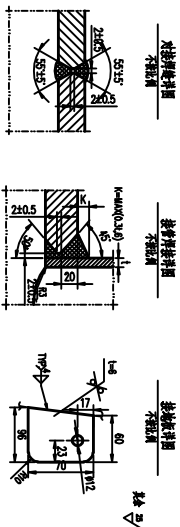
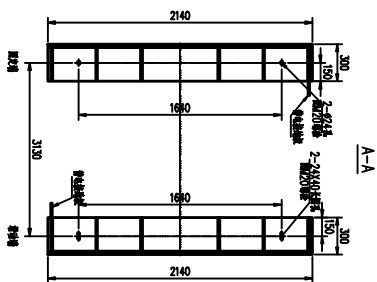
- Overall diameter: 2200±1.5
- Head radius: R1100
- Head thickness: 7L
- Head reinforcement: 200# 100% (A)
- Head reinforcement: 160# 100% (B)
- Head reinforcement: 80# 100% (C)
- Head reinforcement: 50# 100% (D)
- Head reinforcement: 25# 100% (E)
- Head reinforcement: 12# 100% (F)
- Head reinforcement: 6# 100% (G)
- Head reinforcement: 3# 100% (H)
- Head reinforcement: 1# 100% (I)
- Head reinforcement: 1# 100% (J)
- Head reinforcement: 1# 100% (K)
- Head reinforcement: 1# 100% (L)
- Head reinforcement: 1# 100% (M)
- Head reinforcement: 1# 100% (N)
- Head reinforcement: 1# 100% (O)
- Head reinforcement: 1# 100% (P)
- Head reinforcement: 1# 100% (Q)
- Head reinforcement: 1# 100% (R)
- Head reinforcement: 1# 100% (S)
- Head reinforcement: 1# 100% (T)
- Head reinforcement: 1# 100% (U)
- Head reinforcement: 1# 100% (V)
- Head reinforcement: 1# 100% (W)
- Head reinforcement: 1# 100% (X)
- Head reinforcement: 1# 100% (Y)
- Head reinforcement: 1# 100% (Z)

Technical drawing of a spherical tank with a dome and a vertical support structure. The drawing includes dimensions: 1500, 2500, 1530, and 3225. It also shows a cross-section of the dome with a 150-degree angle and a 45-degree angle. A small detail of a bolt is shown on the right.

主 張 特 性					
名 稱	材料牌名	材料規格	標準年份	使用規格	應加要求
鋼板(人字紋鋼板)	Q345R		38/77.5-2014	無縫	無縫鋼板
注3:人字紋鋼	16MnH	電鍍	10/1.47008-2017	Zn	
人字紋鋼	Q345R	電鍍	38/77.5-2014	Zn	

管 口 表

序号	材料名称	规格	单位	数量	备注
1	钢筋	HPB235-2000	mm	14.75	14.75
2	钢筋	HPB235-2000	mm	14.75	14.75
3	钢筋	HPB235-2000	mm	14.75	14.75
4	钢筋	HPB235-2000	mm	14.75	14.75
5	钢筋	HPB235-2000	mm	14.75	14.75
6	钢筋	HPB235-2000	mm	14.75	14.75
7	钢筋	HPB235-2000	mm	14.75	14.75
8	钢筋	HPB235-2000	mm	14.75	14.75
9	钢筋	HPB235-2000	mm	14.75	14.75
10	钢筋	HPB235-2000	mm	14.75	14.75
11	钢筋	HPB235-2000	mm	14.75	14.75
12	钢筋	HPB235-2000	mm	14.75	14.75
13	钢筋	HPB235-2000	mm	14.75	14.75
14	钢筋	HPB235-2000	mm	14.75	14.75
15	钢筋	HPB235-2000	mm	14.75	14.75
16	钢筋	HPB235-2000	mm	14.75	14.75
17	钢筋	HPB235-2000	mm	14.75	14.75
18	钢筋	HPB235-2000	mm	14.75	14.75
19	钢筋	HPB235-2000	mm	14.75	14.75
20	钢筋	HPB235-2000	mm	14.75	14.75
21	钢筋	HPB235-2000	mm	14.75	14.75
22	钢筋	HPB235-2000	mm	14.75	14.75
23	钢筋	HPB235-2000	mm	14.75	14.75
24	钢筋	HPB235-2000	mm	14.75	14.75
25	钢筋	HPB235-2000	mm	14.75	14.75
26	钢筋	HPB235-2000	mm	14.75	14.75
27	钢筋	HPB235-2000	mm	14.75	14.75
28	钢筋	HPB235-2000	mm	14.75	14.75
29	钢筋	HPB235-2000	mm	14.75	14.75
30	钢筋	HPB235-2000	mm	14.75	14.75
31	钢筋	HPB235-2000	mm	14.75	14.75
32	钢筋	HPB235-2000	mm	14.75	14.75
33	钢筋	HPB235-2000	mm	14.75	14.75
34	钢筋	HPB235-2000	mm	14.75	14.75
35	钢筋	HPB235-2000	mm	14.75	14.75
36	钢筋	HPB235-2000	mm	14.75	14.75
37	钢筋	HPB235-2000	mm	14.75	14.75
38	钢筋	HPB235-2000	mm	14.75	14.75
39	钢筋	HPB235-2000	mm	14.75	14.75
40	钢筋	HPB235-2000	mm	14.75	14.75
41	钢筋	HPB235-2000	mm	14.75	14.75
42	钢筋	HPB235-2000	mm	14.75	14.75
43	钢筋	HPB235-2000	mm	14.75	14.75
44	钢筋	HPB235-2000	mm	14.75	14.75
45	钢筋	HPB235-2000	mm	14.75	14.75
46	钢筋	HPB235-2000	mm	14.75	14.75
47	钢筋	HPB235-2000	mm	14.75	14.75
48	钢筋	HPB235-2000	mm	14.75	14.75
49	钢筋	HPB235-2000	mm	14.75	14.75
50	钢筋	HPB235-2000	mm	14.75	14.75
51	钢筋	HPB235-2000	mm	14.75	14.75
52	钢筋	HPB235-2000	mm	14.75	14.75
53	钢筋	HPB235-2000	mm	14.75	14.75
54	钢筋	HPB235-2000	mm	14.75	14.75
55	钢筋	HPB235-2000	mm	14.75	14.75
56	钢筋	HPB235-2000	mm	14.75	14.75
57	钢筋	HPB235-2000	mm	14.75	14.75
58	钢筋	HPB235-2000	mm	14.75	14.75
59	钢筋	HPB235-2000	mm	14.75	14.75
60	钢筋	HPB235-2000	mm	14.75	14.75
61	钢筋	HPB235-2000	mm	14.75	14.75
62	钢筋	HPB235-2000	mm	14.75	14.75
63	钢筋	HPB235-2000	mm	14.75	14.75
64	钢筋	HPB235-2000	mm	14.75	14.75
65	钢筋	HPB235-2000	mm	14.75	14.75
66	钢筋	HPB235-2000	mm	14.75	14.75
67	钢筋	HPB235-2000	mm	14.75	14.75
68	钢筋	HPB235-2000	mm	14.75	14.75
69	钢筋	HPB235-2000	mm	14.75	14.75
70	钢筋	HPB235-2000	mm	14.75	14.75
71	钢筋	HPB235-2000	mm	14.75	14.75
72	钢筋	HPB235-2000	mm	14.75	14.75
73	钢筋	HPB235-2000	mm	14.75	14.75
74	钢筋	HPB235-2000	mm	14.75	14.75
75	钢筋	HPB235-2000	mm	14.75	14.75
76	钢筋	HPB235-2000	mm	14.75	14.75
77	钢筋	HPB235-2000	mm	14.75	14.75
78	钢筋	HPB235-2000	mm	14.75	14.75
79	钢筋	HPB235-2000	mm	14.75	14.75
80	钢筋	HPB235-2000	mm	14.75	14.75
81	钢筋	HPB235-2000	mm	14.75	14.75
82	钢筋	HPB235-2000	mm	14.75	14.75
83	钢筋	HPB235-2000	mm	14.75	14.75
84	钢筋	HPB235-2000	mm	14.75	14.75
85	钢筋	HPB235-2000	mm	14.75	14.75
86	钢筋	HPB235-2000	mm	14.75	14.75
87	钢筋	HPB235-2000	mm	14.75	14.75
88	钢筋	HPB235-2000	mm	14.75	14.75
89	钢筋	HPB235-2000	mm	14.75	14.75
90	钢筋	HPB235-2000	mm	14.75	14.75
91	钢筋	HPB235-2000	mm	14.75	14.75
92	钢筋	HPB235-2000	mm	14.75	14.75
93	钢筋	HPB235-2000	mm	14.75	14.75
94	钢筋	HPB235-2000	mm	14.75	14.75
95	钢筋	HPB235-2000	mm	14.75	14.75
96	钢筋	HPB235-2000	mm	14.75	14.75
97	钢筋	HPB235-2000	mm	14.75	14.75
98	钢筋	HPB235-2000	mm	14.75	14.75
99	钢筋	HPB235-2000	mm	14.75	14.75
100	钢筋	HPB235-2000	mm	14.75	14.75

[illegible]

青岛康泰工程机械有限公司						/
品名		R22 404 标准轴	数量	壹套	规格	KDW1565-1
单位		V=50m ³				
材料费		DN250X6795				
运费						
加工费						
其他						
合计	1307	壹套	41	壹	1套	2018年9月9日